



### PERFORMANCES

MODEL	m <sup>3</sup> /h	l/s	Pa	W	dB (A)*
MINISTYLE	90	25	26	14	39
MINISTYLE TIMER	90	25	26	14	39


\* Sound pressure at 3 mt




Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- Ideal for small premises
- Easy to install and extremely compact (front cover 17 mm, height and width 14 mm)
- Made in high quality antistatic technopolymer
- Long Life sleeve bearing motor

### INSTALLAZIONI




WALL

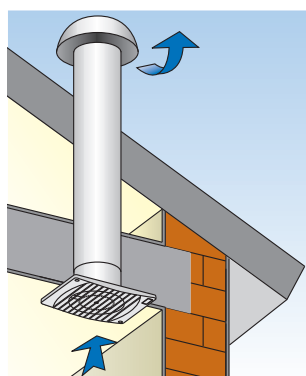

CEILING \*


### CURVE

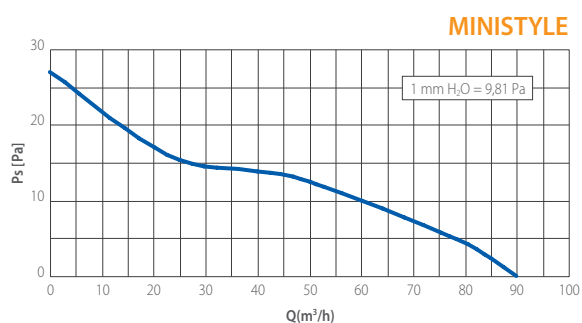

### VERSIONS

- STANDARD**  
On/off through light or remote control switch.
- PULL CORD**  
On/off through pull cord switch.
- TIMER**  
Integral electronic timer adjustable from 3 to 25 minutes.

### DIMENSIONS (mm)



MODEL	A	B	C	D	E	Kg.
MINISTYLE	140	140	65	17	98	0,5

\*Only Ministyle without back-draught shutters